

Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2
HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED

www.ledlight-components.com

#### Features:

- 1. Fast response time.
- 2. High photo sensitivity.
- 3. Small junction capacitance.
- 4. Package in 8mm tape on 7" diameter reel.
- 5. The product itself will remain within RoHS compliant Version.

#### **Descriptions:**

- 1. The 0603 is a high speed and high sensitive silicon NPN phototransistor in miniature SMD package which is molded in a water clear epoxy with flat top view lens.
- 2. Due to its water clear epoxy, the device is spectrally matched to visible and infrared emitting diode.


#### **♦** Applications:


- 1. Automatic door sensor.
- 2. Infrared applied system.
- 3. Counters and sorters.
- 4. Encoders.
- 5. Floppy disk drive.
- 6. Optoelectronic switch.
- 7. Video camera, tape and card readers.
- 8. Position sensors.
- 9. Copier.
- 10. Game machine.


Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007 Page: 2 OF 9

HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED

### ◆ Package Dimension:








# **Polarity**

#### **Recommended Soldering Pad Dimensions**



Part No.	Chip Material	Lens Color	Source Color
DL-PCB00603PTC-1PT120	Silicon	Water Clear	Phototransistor

#### Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ± 0.10mm (.004") unless otherwise specified.
- 3. Specifications are subject to change without notice.

Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2
HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED

Date: Mar./23/2007 Page: 3 OF 9

◆ Absolute Maximum Ratings (Ta=25°C)

Parameters	Symbol	Rating	Unit	
Power Dissipation At (or below) 25 ℃ free Air Temperature	P <sub>D</sub>	100	mW	
Collector-Emitter Voltage	$V_{CEO}$	50	V	
Emitter-Collector-Voltage	V <sub>ECO</sub>	5	V	
Collector Current	I <sub>C</sub>	20	mA	
Operating Temperature	Topr	-25 to +80	$^{\circ}$	
Storage Temperature	Tstg	-30 to +85	$^{\circ}$	
Soldering Temperature	Tsol	260℃ for 5 Seconds		

### Electrical Optical Characteristics at Ta=25℃


Parameters	Symbol	Min.	Тур.	Max.	Unit	Condition
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	30			V	I <sub>C</sub> =100μA, Ee=0mW/cm²
Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	5			V	I <sub>E</sub> =100μΑ, Ee=0mW/cm²
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.40	٧	I <sub>C</sub> =2mA, Ee=1mW/cm²
Collector Dark Current	I <sub>CEO</sub>			100	nA	V <sub>CE</sub> =20V, Ee=0mW/cm²
On State Collector Current	I <sub>C(ON)</sub>	0.67	1.50		mA	V <sub>CE</sub> =5V, Ee=1mW/cm²
Optical Rise Time (10% to 90%)	$T_R$		15		lie.	V <sub>CE</sub> =5V,
Optical Fall Time (90% to 10%)	T <sub>F</sub>		15		μs	I <sub>C</sub> =1mA, R <sub>L</sub> =1000Ω
Reception Angle	2θ <sub>1/2</sub>		120		Deg	
Wavelength Of Peak Sensitivity	λР		940		nm	
Rang Of Spectral Bandwidth	λ0.5	400		1100	nm	


Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007

HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED www


### **Typical Electrical / Optical Characteristics Curves**

(25°C Ambient Temperature Unless Otherwise Noted)







Collector Current & Irradiance




Relative Collector Current & Ambient Temperature



Collector Power Dissipation & Ambient Temperature



Collector Dark Current & **Ambient Temperature** 



Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007 Page: 5 OF 9 HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO., LIMITED

### • Reliability Test Item And Condition:

The reliability of products shall be satisfied with items listed below:


Confidence level: 90%.

LTPD: 10%.

No.	ltem	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgment Criteria	Ac/ Re
1	Reflow Soldering	TEMP.: 260℃ <u>+</u> 5℃ 5secs	6mins	22pcs	Ic <sub>(ON)</sub> ≦L×0.8 L: Lower	0/1
2	Temperature Cycle	H: +100°C 15mins  5 mins  L: -40°C 15mins	50Cycles	22pcs		0/1
3	Thermal Shock	H: +100°C 15mins	50Cycles	22pcs		0/1
4	High Temperature Storage	TEMP.: +100°C	1000hrs	22pcs	Specification Limit	0/1
5	Lower Temperature Storage	TEMP.: -40℃	1000hrs	22pcs		0/1
6	DC Operating Life	V <sub>CE</sub> =5V	1000hrs	22pcs		0/1
7	High Temperature/ High Humidity	85℃ /85% R.H	1000hrs	22pcs		0/1

Date: Mar./23/2007 Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Page: 6 OF 9 HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED

### **♦** Reel Dimensions:

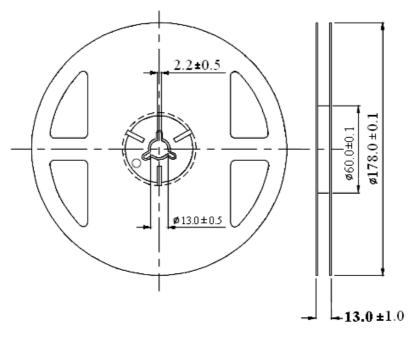


Unit: mm


Tolerance:  $\pm 0.25$ mm

### **Carrier Tape Dimensions:**

Loaded quantity 3000PCS per reel.

### **Progressive Direction**

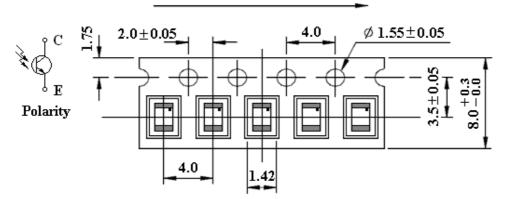



Unit: mm

Tolerance:  $\pm 0.10\,\text{mm}$ 

Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007 HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED


Page: 7 OF 9 www.ledlight-components.com

#### Please read the following notes before using the product:

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at 30℃ or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture adsorbent material (silica gel) has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment:  $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile.

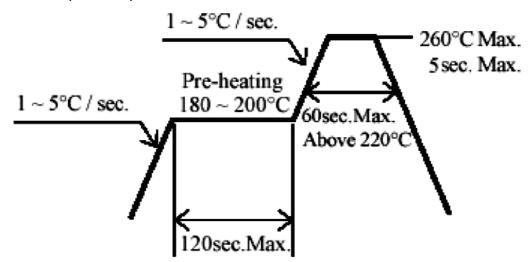


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $260^{\circ}$ C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007 Page: 8 OF 9



#### 6. Caution in ESD

Static Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Spec No.: DL-PCB0603PTC-1PT120 Rev No.: V.2 Date: Mar./23/2007 Page: 9 OF 9